BRUHAT BANGALORE MAHANAGARA PALIKE
YELAHANKA ZONE

Name of work: Improvements to Road and Drains at Agrahara Village to Lake Road in ward No. 05 Byatarayanapura Sub Division

		Estimate Cost Rs.						4000000.00	
Sl No	Description of item	Unit	No	L	B	D	Qty	Rate	Amount
1	KSRB 2-1.1: Earth work in surface excavation in ordinary soil for leveling and lowering the ground manually (other than foundation of buildings, culverts, road drains and trenches of pipe line and cables) and removing the excavated stuff to a distance not exceeding 50m and lift upto 1.5m, excavated surface leveled and neatly dressed, disposed earth to be leveled after breaking of clods and neatly dressed as per specifications, Specification No KBS 2.1(a) / 2.3.1,P. No. 5/ Item No. 2.1/ PWD SR 2014-15	cum							
	Desilting of Drain								
	Sonnappa Layout		2	108.00	0.40	0.25	21.60		
			2	175.00	0.40	0.25	35.00		
	For Road Surface		1	350.00	5.50	0.25	481.25		
	Berm Cutting								
			2	350.00	1.50	0.30	315.00		
							852.85	146.88	**125267.00**
	Basic Rate	136.00							
	Area Weightage @ 8%	10.88							
	Total	**146.88**							
2	KSRB 2-2.1 : earth work excavation for foundation of buildings, culverts water supply, sanitary line and electrical conduits either in pits or in trenches 1.5m and above in width, in **Hard soil** not exceeding 1.5m, in depth including dressing the bottom and sides of pits and trenches, stacking the excavated soil clear from edges of excavation with lead upto 50m, after breaking of clods complete as per specifications, specification, No, KBS 2.1(b) / 2.3.5,P No. 5/ Item No. 2.4/ PWD SR 2014-	Cum							
	For BS Slab Agrahara Village to Tank Road		1	350.00	0.75	0.75	196.88		
							196.88	264.60	**52093.00**
	Basic Rate	245.00							
	Area Weightage @ 8%	19.60							
	Total	**264.60**							
3	Removing B.S Slab of Drain and stacking Page No.25/ Item No. 5.32/ PWD SR 2014-15	Sqm							
	Sonnappa Layout		2	108.00	1.65		356.40		
			2	175.00	1.65		577.50		
							933.90		
	Deduct 20% Missing Slabs						186.78		
							747.12	58.32	**43572.00**
	Basic Rate	54.00							

	Description of item	Unit	No	L	B	D	Qty	Rate	Amount
	Area Weightage @ 8%	4.32							
	Total	**58.32**							
4	Refixing stone slabs of drains and pointing in C.M (1:3) Page No. 25/ Item No. 5.33/ PWD SR 2014-15	Sqm							
			Qty Vide Item No.3				747.12		
							747.12	**75.60**	**56482.00**
	Basic Rate	70.00							
	Area Weightage @ 8%	5.60							
	Total	**75.60**							
5	Providing granite slabs of selected quality roughly dressed and fixed in cement mortar(1:6) including fixing curing etc, complete -do- 7.5 cms thick Page No.25/ Item No. 5.31.1/ PWD SR 2014-15	**Sqm**							
	For Missing slabs (20%)		Missing Slabs				186.78		
	For New Salb Agahara Village to Tank Road		1	350	1.65		577.50		
							764.28	639.36	**488650.00**
	Basic Rate	592.00							
	Area Weightage @ 8%	47.36							
	Total	**639.36**							
6	KSRB-4-1.3 : Providing and laying in position **plain cement concrete of mix M 1:4:8** withOPC cement at 180kgs, with 40mm and down size graded granite metal coarse aggregates @0.892cum and fine aggregates @0.57cum machine mixed, concrete laid in layers not, exceeding 15cms, thick, well compacted, in foundation and plinth, including cost of all materials, labour, HOM of machinery, curing complete as per specifications. Specification No. KBS 4.1,4.2, No. 12/ Item No. 4.3/ PWD SR 2014-15	**Cum**							
	Sonnappa Layout		1	108.00	5.50	0.15	89.10		
			1	175.00	5.00	0.15	131.25		
							220.35	4847.04	**1068045.00**
	Basic Rate	4488.00							
	Area Weightage @ 8%	359.04							
	Total	**4847.04**							
7	Providing and laying cement concrete using 20mm and down size granite jelly of ready mixed concrete (RMC)for R.C.C works laid in 15cms thick layers and well compacted vibrating, curing, finishing with necessary cement mortar, form works and scaffoldings to withstand pumping of concrete, with all lead and lifts etc., complete (exclusive of cost of steel and fabrication charges.) Ready mixed Cement concrete M-20 for raft foundation, column footing, main and secondary beams. Page No. 18/ Item No. 4.48/ PWD SR 2014-15	Cum							
	Sonnappa Layout		1	108.00	5.50	0.10	59.40		
			1	175.00	5.00	0.10	87.50		
							146.90	5847.12	**858942.00**
	Basic Rate	5414.00							
	Area Weightage @ 8%	433.12							

No	Description of item	Unit	No	L	B	D	Qty	Rate	Amount
	Total	**5847.12**							
8	KSRRB M2600-3: (ii) Providing & fixing 20 mm thick compressible fibre board in expansion joint complete as per drawing & technical specification complete as per specifications, MORTH specification No. 2605, No. 233/ Item No. 31.3 PWD SR 2014-15	M							
	Sonnappa Layout		24	5.50			132.00		
			35	5.00			175.00		
							307.00	138.24	**42440.00**
	Basic Rate	128.00							
	Area Weightage @ 8%	10.24							
	Total	**138.24**							
9	Vaccum De- writing with vaccum pump and suction mat and compaction with skin flater clubbed with floatiog disc including cost of generator, HOM of machinery Sereed Vibratory Power Floaterblade and diisc etc. with all lead and lift No. 171/ Item No. 22.7/ PWD SR 2014-15	Sqm							
	Sonnappa Layout		1	108.00	5.50		594.00		
			1	175.00	5.00		875.00		
							1469.00	97.20	**142787.00**
	Basic Rate	90.00							
	Area Weightage @ 8%	7.20							
	Total	**97.20**							
10	KSRRB M400-17: Providing, laying spreading and compacting graded stones aggregate to **wet mix macadam** specifications including premixing the material with water at OMC in mechanical mix plant carriage of mixed method of tipper to site, laying, in uniform layers with paver in sub base course on well prepared surface and compacting with vibratory roller to achieve the desired density complete as per specifications. MORTH specification NO. 406,P No. 154/ Item No. 20.18/ PWD SR 2014-15	Cum							
	Agrahara Village to Tank Road		1	350.00	5.50	0.20	385.00		
							385.00	1438.56	**553846.00**
	Basic Rate	1332.00							
	Area Weightage @ 8%	106.56							
	Total	**1438.56**							
11	KSRRB 500-4: providing and applying **primer coat** from 7.5 to 9.8 kg and 9.8 to 12.2kg per 10 sqm for surfaces of low and medium porosity respectively over prepared surface of granular base with cut bank M.C-70 or any other bitumen mixed with diesel at 10 kg per 10 sqm heated in bitumen boiler fitted with spray set (excluding cleaning of road surface) including cost of all materials, labour, HOM of machineries complete as per specificationsDo- Medium Porosity MORTH chapter 5, No. 175/ Item No. 21.6/ PWD SR 2015-16	Sqm							
	Agrahara Village to Tank Road		1	350.00	5.50		1925.00		

o	Description of item	Unit	No	L	B	D	Qty	Rate	Amount
							1925.00	31.32	60291.00
	Basic Rate	29.00							
	Area Weightage @ 8%	2.32							
	Total	31.32							
12	KSRRB M500-18: Providing and laying **semi dense bituminous concrete 25mm thick** with 100-120 TPH batch type HMP producing an average output of 75 tonnes per hour using crushed aggregates of specified grading, premixed with bituminous binder at 4.5 to 5% of mix and filler, transporting the hot mix to work site, laying with a hydrostatic paver finisher with sensor control to the required grade, level and alignment, rolling with smooth wheeled, vibratory and tandem roller to achieve the desired compaction as per MORTH specifications clause No. 500.8 complete in all respects as per specifications. P. No. 174/ Item No. 21.20/ PWD SR 2014-15	Cum							
	Agrahara Village to Tank Road		1	350.00	5.50	0.025	48.13		
							48.13	8475.84	**407900.00**
	Basic Rate	7848.00							
	Area Weightage @ 8%	627.84							
	Total	**8475.84**							
13	Lead for Disposal of Debris shall be payable at carage rates by Mechanical means inlcuding loading and unloading. From 0.00 to 2.00 Km (Page No.123,	Cum							
			Qty. Vide Item No. 1				**852.85**		
							852.85	68.12	58096.00
	Basic Rate Lead Charges Upto 2.00 Kms	5.12							
	PWD SR 2014-15 (P.130/I.17.1) For loading and unloading	63.00							
	Total	**68.12**							
							Grand Total		3958411.00
14	For 1% Third Party Charges								39584.00
15	Miscesallaneous Charges	L/S							2005.00
								Total	4000000.00

Rupees Forty Lakh(s) Only

ADMINISTRATIVELY SANCTIONED FOR Rs 40.00 lakhs
Rupees forty lakhs only
Under P-3089
Registered as EE ( ) No 3 9
Subject to conditions contained in enclosed memo EE ( ) No 191
Dt Estimate A/Sanctioned
JC(Y)/08/15-16 dated 20/8/2015 Rs 40.00 lakhs
Joint Commissioner (Yelahanka Zone) BBMP Bengaluru-92.

CERTIFICATE

1 The work spot has been inspected and the work is found necessary.
2 This estimate is prepared as per PWD SR of 2014-15
3 The provisions were made in this estimate are necessary and adequate.
4 This works come under B.B.M.P. limits.

Assistant Engineer
ಸಹಾಯಕ ಅಭಿಯಂತರರು
ಬ್ಯಾಟರಾಯನಪುರ ಉಪ ವಿಭಾಗ

Executive Engineer
Byatarayanapura Division
Bruhat Bangalore Mahanagara Palike

Assistant Executive Engineer

Technical Sanction
Accorded For 40.00 lakh Rs
Head of A/C P3089
CER NO : 18 **Dt:** 21.8.15

TA

CE (YNK)

2

N

PROPOSED ASPHALT (S.D.B.C)

PROPOSED CEMENT CONCRETE ROAD

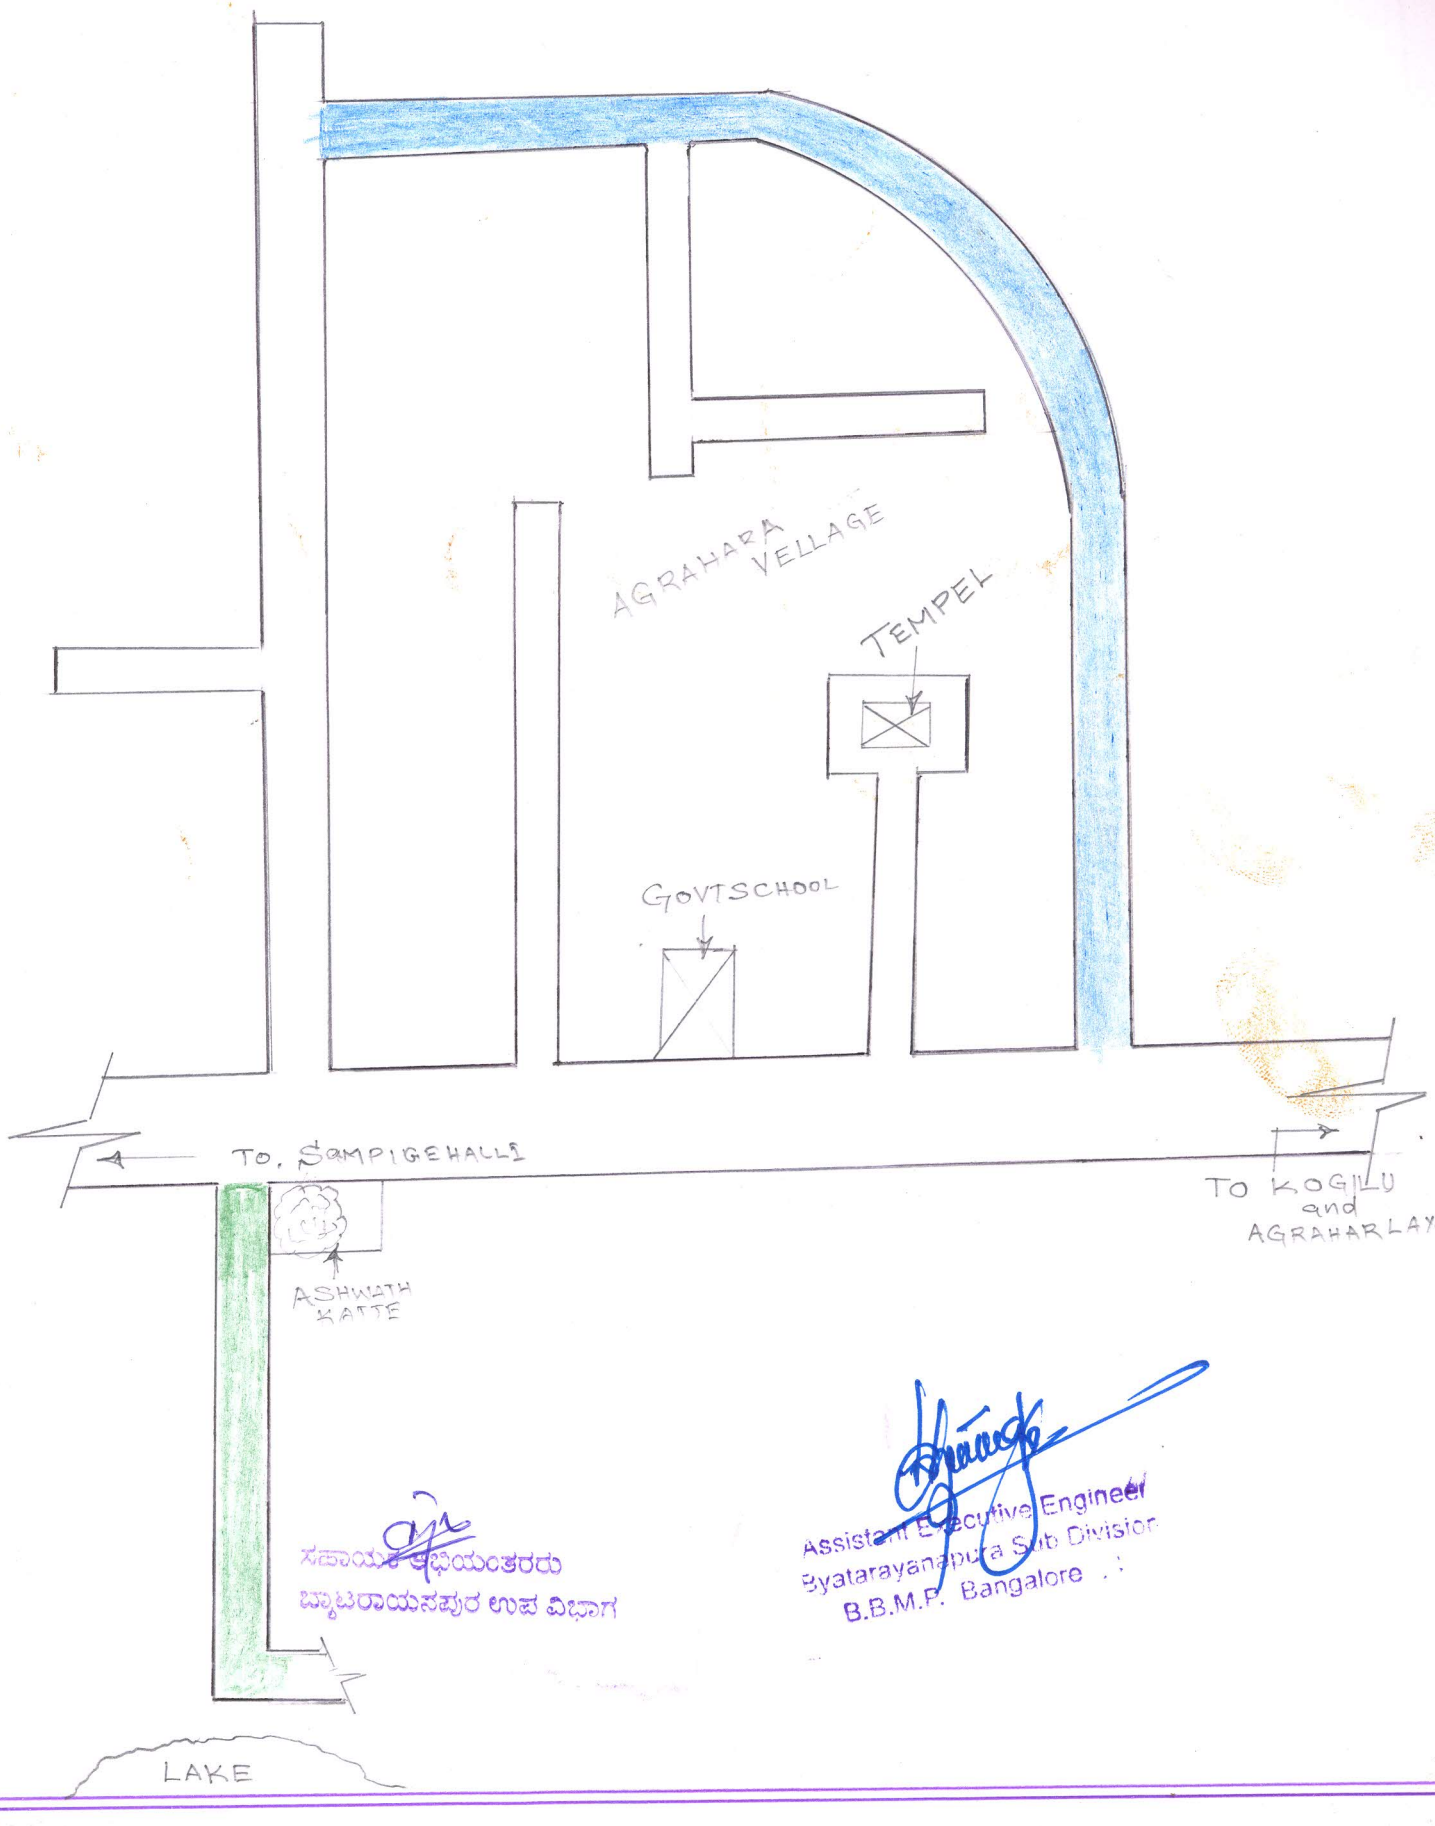

ಸಹಾಯಕ ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರರು
ಬ್ಯಾಟರಾಯನಪುರ ಉಪ ವಿಭಾಗ

Assistant Executive Engineer
Byatarayanapura Sub Division
B.B.M.P. Bangalore